




# AVPL TRD - Teardrop Luminaire

## Description







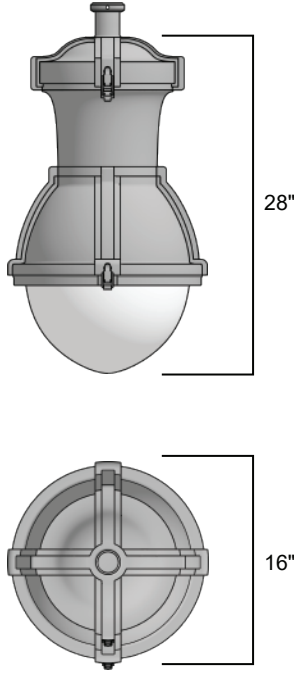










Decorative architectural design provides a unique lighting solution for a variety of applications. The TRD series by AV Poles and Lighting is ideal for commercial, municipal, and design build lighting applications.

## Features

- Cast Aluminum construction
- Stainless Steel hardware
- Dark Sky/ Full Cutoff
- IP67 rated modules - 5 year warranty
- Up to 130+ Lumens Per Watt output
- Low maintenance cost with lifetime >54,000 hrs
- Multiple lighting distribution options with optical lens transmittance up to 98%
- Multiple LED modules can easily be connected in series
- TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.



## Ordering Information

Luminaire	Lamp Type	Volts	Mounting	Finish	Options																																																		
<b>AVPL TRD</b> <input type="checkbox"/>	<b>LED</b> <small>*Please call factory for alternate lamp options*</small>	120			<input type="checkbox"/>  Flat Skirt																																																		
	<b>700mA</b> 35W <input type="checkbox"/> 71W <input type="checkbox"/> 104W <input type="checkbox"/> 136W <input type="checkbox"/> 55W <input type="checkbox"/> 106W <input type="checkbox"/> 156W <input type="checkbox"/> 205W <input type="checkbox"/>	208	<input type="checkbox"/> Wall Mount..... 	<input type="checkbox"/> Dark Bronze	<input type="checkbox"/>  Shallow Skirt																																																		
<b>Optics</b> <input type="checkbox"/> Type II  <input type="checkbox"/> Type III  <input type="checkbox"/> Type IV  <input type="checkbox"/> Type V 	<b>1A</b> 35W <input type="checkbox"/> 71W <input type="checkbox"/> 104W <input type="checkbox"/> 136W <input type="checkbox"/> 55W <input type="checkbox"/> 106W <input type="checkbox"/> 156W <input type="checkbox"/> 205W <input type="checkbox"/>	240	<input type="checkbox"/> 1.....  <input type="checkbox"/> 2-90.....  <input type="checkbox"/> 2-180.....  <input type="checkbox"/> 3-90.....  <input type="checkbox"/> 3-120.....  <input type="checkbox"/> 4-90..... 	<input type="checkbox"/> Black <input type="checkbox"/> White <input type="checkbox"/> Grey <input type="checkbox"/> Green	<input type="checkbox"/>  Swivel Pendant Mount																																																		
	<b>Lumen Output (4K)</b>	277			<input type="checkbox"/>  Swivel Pendant Mount																																																		
	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th></th> <th>35W 700mA</th> <th>55W 1A</th> <th>71W 700mA</th> <th>106W 1A</th> </tr> </thead> <tbody> <tr> <td>Type II</td> <td>4,424</td> <td>6,017</td> <td>8,848</td> <td>12,033</td> </tr> <tr> <td>Type III</td> <td>4,558</td> <td>6,199</td> <td>9,116</td> <td>12,398</td> </tr> <tr> <td>Type IV</td> <td>4,381</td> <td>5,958</td> <td>8,762</td> <td>11,916</td> </tr> <tr> <td>Type V</td> <td>4,432</td> <td>6,028</td> <td>8,864</td> <td>12,055</td> </tr> <tr> <th></th> <th>104W 700mA</th> <th>156W 1A</th> <th>136W 700mA</th> <th>205W 1A</th> </tr> <tr> <td>Type II</td> <td>13,272</td> <td>18,050</td> <td>17,696</td> <td>24,067</td> </tr> <tr> <td>Type III</td> <td>13,674</td> <td>18,597</td> <td>18,232</td> <td>24,796</td> </tr> <tr> <td>Type IV</td> <td>13,143</td> <td>17,874</td> <td>17,524</td> <td>23,833</td> </tr> <tr> <td>Type V</td> <td>13,296</td> <td>18,083</td> <td>17,728</td> <td>24,110</td> </tr> </tbody> </table>		35W 700mA	55W 1A	71W 700mA	106W 1A	Type II	4,424	6,017	8,848	12,033	Type III	4,558	6,199	9,116	12,398	Type IV	4,381	5,958	8,762	11,916	Type V	4,432	6,028	8,864	12,055		104W 700mA	156W 1A	136W 700mA	205W 1A	Type II	13,272	18,050	17,696	24,067	Type III	13,674	18,597	18,232	24,796	Type IV	13,143	17,874	17,524	23,833	Type V	13,296	18,083	17,728	24,110	208	MT		<input type="checkbox"/>  Swivel Pendant Mount
	35W 700mA	55W 1A	71W 700mA	106W 1A																																																			
Type II	4,424	6,017	8,848	12,033																																																			
Type III	4,558	6,199	9,116	12,398																																																			
Type IV	4,381	5,958	8,762	11,916																																																			
Type V	4,432	6,028	8,864	12,055																																																			
	104W 700mA	156W 1A	136W 700mA	205W 1A																																																			
Type II	13,272	18,050	17,696	24,067																																																			
Type III	13,674	18,597	18,232	24,796																																																			
Type IV	13,143	17,874	17,524	23,833																																																			
Type V	13,296	18,083	17,728	24,110																																																			
	<b>Color Temp</b>	120-277 Voltage Sensing <input type="checkbox"/>			<input type="checkbox"/>  Swivel Pendant Mount																																																		
<b>Option</b> House Side Shield <input type="checkbox"/>	3000K Warm <input type="checkbox"/> 4000K Neutral <input type="checkbox"/> 5000K Cool <input type="checkbox"/>	<input type="checkbox"/> = LED Only		<b>Lens</b> Textured Polycarbonate <input type="checkbox"/> No Lens <input type="checkbox"/>	<b>Electrical</b> 10-20KV Surge Protector <input type="checkbox"/> 0-10V Dimmable Driver(s) <input type="checkbox"/> Photo Cell + Voltage <input type="checkbox"/> High/Low Dimming for Hardwired Switching or Non-Integrated Motion Sensor <input type="checkbox"/>																																																		